



MEB
METALLIZED
POLYESTER FILM
CAPACITOR

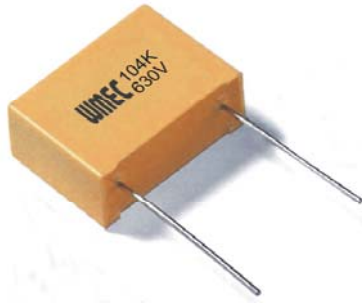

▪ **SPECIFICATION:**

- OPERATING TEMPERATURE: -40 ~ +85°C
- CAPACITANCE RANGE: .01~6.8 μF
- CAPACITANCE TOLERANCE: ±5%, ±10%, ±20%
- RATED VOLTAGE: DC 100V 250V 400V 630V
- DISSIPATION FACTOR: 0.75% MAX AT 1KHz 25°C
- INSULATION RESISTANCE: >30,000 MΩ (C ≤ .33 μF), >10,000 MΩ*μF (C>.33 μF) AT 25°C
- DIELECTRIC STRENGTH: 150% OF RATED VOLTAGE FOR 5 SEC

P	d ∅
UP TO 13 mm	0.6 mm
OVER 13 mm	0.8 mm

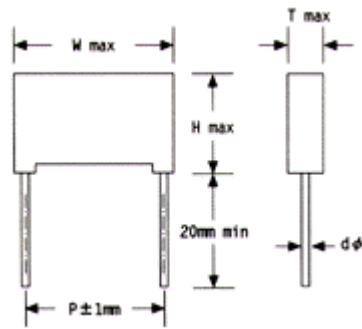

▪ **FEATURES:**

- NON-INDUCTIVE CONSTRUCTION
- SELF-HEALING PROPERTY
- SUPERIOR MOISTURE RESISTANCE

Unit:mm

μF	Case code			
	100VDC	250VDC	400VDC	630VDC
0.010	B2	B2	C2	C1
0.015	B2	B2	C2	C2
0.022	B2	B2	C2	C3
0.033	B2	B2	C2	D1
0.047	B2	C1	C3	D2
0.068	B2	C1	D1	D3
0.10	C2	C2	D2	E1
0.15	C2	D1	D3	E2
0.22	C2	D1	E1	E3
0.33	C3	D2	E2	F1
0.47	D1	E1	E3	F2
0.68	D2	E2	F1	
1.0	D3	E2	F1	
1.5	E2	E4		
2.2	E3	F1		
3.3	E4	F2		
4.7	F1	G1		
6.8	F2			

Case code	Dimensions			
	W	H	T	P
B2	10.5	9.0	4.0	7.5
C1	13.0	9.0	4.0	10.0
C2	13.0	11.0	5.0	10.0
C3	13.0	12.0	6.0	10.0
D1	18.0	11.0	5.0	15.0
D2	18.0	12.0	6.0	15.0
D3	18.0	14.0	7.5	15.0
E1	26.5	15.0	6.0	22.5
E2	26.5	16.5	7.0	22.5
E3	26.5	17.0	8.5	22.5
E4	26.5	19.0	10.0	22.5
F1	32.0	20.0	11.0	27.5
F2	32.0	22.0	13.0	27.5
G1	32.0	30.0	15.0	27.5